


Copper Roofing Nails (Slating Nails) Smooth Shank

PROUDLY SERVICING CONTRACTORS AND BUILDERS FOR OVER 150 YEARS

Copper Roofing Nails (Slating Nails) Smooth Shank

- **Best Choice for:** Installation of Slate, Tile and Copper Roofing
- **Best Choice for:** Installation of Copper Flashing and Hardware
- **Best Choice for:** Long term corrosion resistance in harsh environments

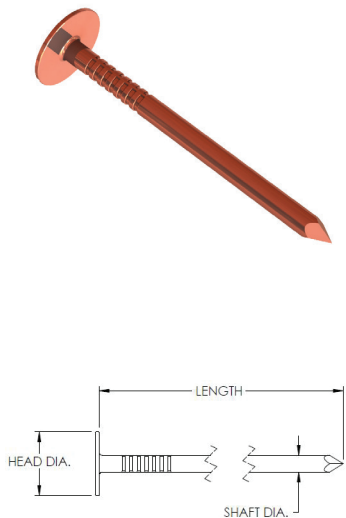

Penny Size	Length (in.)	Gauge	Head Dia. (in.)	Shank Dia. (In.)	Approx. Count/Lbs.	1 lb. Part#	5 lb. Part#	25 lb. Part#	50 lb. Part#
2d	1	10	27/64	0.134	191	3J0292	3J0291	3J0293	3J0290
2d	1	11	3/8	0.120	240	3J0284	3J0281	3J0283	3J0280
3d	1 1/4	10	27/64	0.134	151	3J0262	3J0261	3J0263	3J0260
3d	1 1/4	11	3/8	0.120	193	3J0254	3J0251	3J0253	3J0250
4d	1 1/2	10	27/64	0.134	146	3J0232	3J0231	3J0233	3J0230
4d	1 1/2	11	3/8	0.120	163	3J0222	3J0221	3J0223	3J0220
5d	1 3/4	10	27/64	0.134	125	3J0192	3J0191	3J0193	3J0190
5d	1 3/4	11	3/8	0.120	156	3J0184	3J0182	3J0185	3J0180
6d	2	10	27/64	0.134	104	3J0162	3J0161	3J0163	3J0160
6d	2	11	3/8	0.120	137	3J0154	3J0151	3J0153	3J0150
7d	2 1/4	10	27/64	0.134	—	3J****	3J****	3J****	3J0119
7d	2 1/4	11	3/8	0.120	80	3J****	3J****	3J0121	3J0120
8d	2 1/2	10	27/64	0.134	89	3J0110	3J0111	3J0105	3J0100
8d	2 1/2	11	3/8	0.120	110	3J0089	3J0091	3J0092	3J0090
10d	3	10	27/64	0.134	68	3J0051	3J0052	3J0057	3J0050
16d	3 1/2	10	27/64	0.134	—	3J0049	3J****	3J****	3J0048

Other sizes available

****Available upon request

- Produced with top quality CDA-110 Copper in conformance with ASTM B49
- Shank diameters fit pre-formed slate and tile holes
- Larger head diameters preferred for covering the tile holes as well as installing copper flashing and vents
- Manufactured with diamond points for easy driving
- Also available with ring barb shanks